SHS-2S7LD SERIES
QUICK SET-UP GUIDE
STEP - 1

Time Under 30 Minutes*
* Installation time may vary based on application and camera cabling

Tools Hand Tools

Skills - Easy Plug & Play connectors, On screen set up

7" LCD VIDEO SURVEILLANCE SYSTEM
WITH 2 DAY/NIGHT* INDOOR/OUTDOOR** CAMERAS

Getting Started

The SHS System comes with the following components:

- 1 x 7" LCD Monitor
- 2 x Weather resistant Color Day/Night* IR Cameras with Stand
- 2 x 60' Extension Cables
- 1 x AV Cable
- 2 x Phone Jack RCA Cables
- 1 x Monitor Stand
- 1 x Wall Mounting Bracket
- 1 x Power Adapter

Check your package to confirm that you have received the complete system, including all components shown above.

* IR illumination range up to 13ft. (4M) under ideal conditions. Objects at or beyond this range may be partially or completely obscured depending on the camera application. Picture changes from Color to B&W under low light conditions.

** Not for use in direct exposure to water, rain or snow

A. Connect Cameras

Before you install the camera, carefully plan where and how you will position the camera, and where you will route the cables.

1 Connect the DIN female end of the supplied 60' extension cables to the cameras.

NOTE: Confirm that the arrows on the DIN Camera Cable and the DIN Extension cable are aligned when connecting the cable. If the pins in the DIN Cable are bent, the Camera will NOT function.

2 Connect the other end of the extension cables to the short phone jack RCA Cables.

3 Connect the short phone jack RCA Cable to the bottom of the monitor.

Monitor Bottom

4 Connect one end of the power adaptor to the power outlet and the other end to the monitor

B. Connectivity Diagram

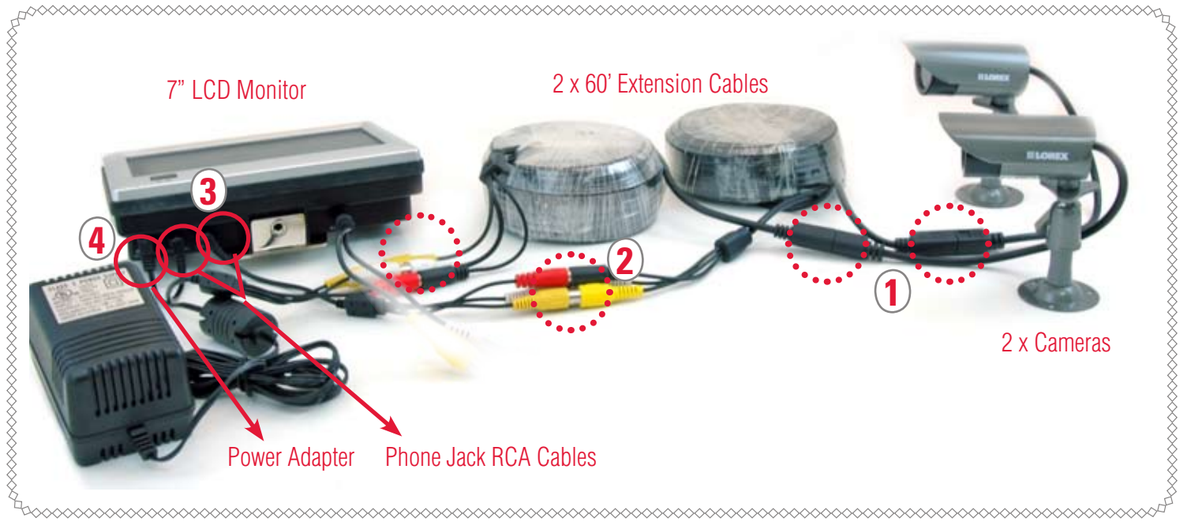

SHS-2S7LD SERIES
QUICK SET-UP GUIDE
STEP - 2

Time — Under 30 Minutes*
* Installation time may vary based on application and camera cabling

Tools — Hand Tools

Skills - Easy — Plug & Play connectors, On screen set up

7" LCD VIDEO SURVEILLANCE SYSTEM
WITH 2 DAY/NIGHT* INDOOR/OUTDOOR** CAMERAS

OPTIONAL STEP

Connect the phone jack end of the Audio/Video Cable to the A/V Output at the bottom of the monitor. Connect the other end (Video - Yellow, Audio - White) to your TV/VCR or Monitor (not included).

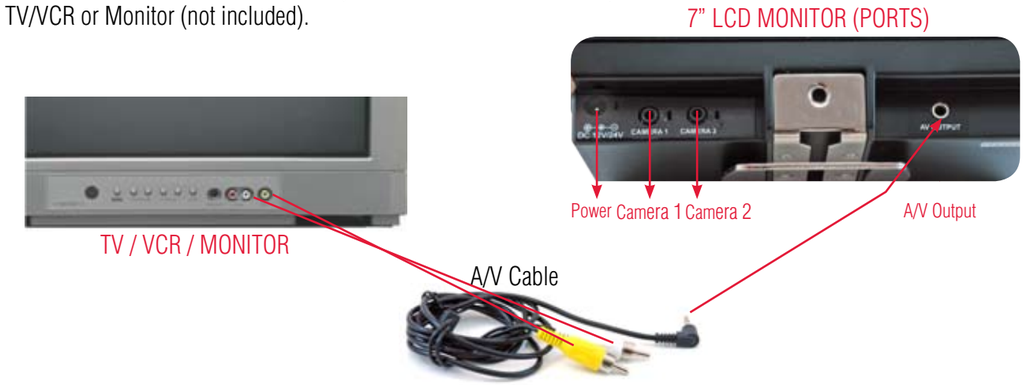

DISPLAY

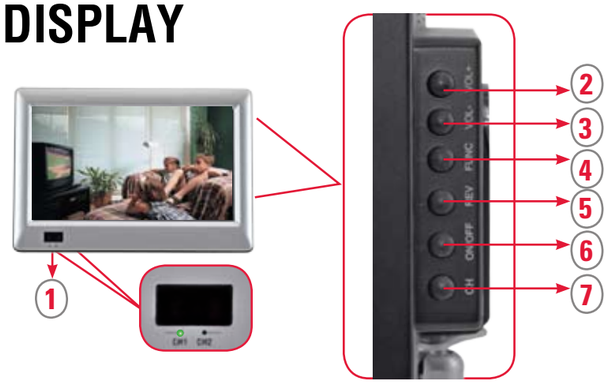

1. Channel display LED indicator
2. Volume / brightness button control (+)
3. Volume / brightness control (-)
4. Function key (OSD for brightness, contrast control)
5. Mirror-view function
6. Power ON/OFF
7. CH Select / Auto switch

Turn ON the monitor by pressing the Power ON/Off button located on the side of the monitor.

Channel Display LED Indicator:

- Select the channel you wish to watch by pressing the channel selection button on the monitor. A permanent green light will appear in the relevant channel (1 or 2).
- Press the channel selection again to switch to the second channel.
- Press one more time for an auto switching mode. Green light will flash.

MOUNTING OPTIONS

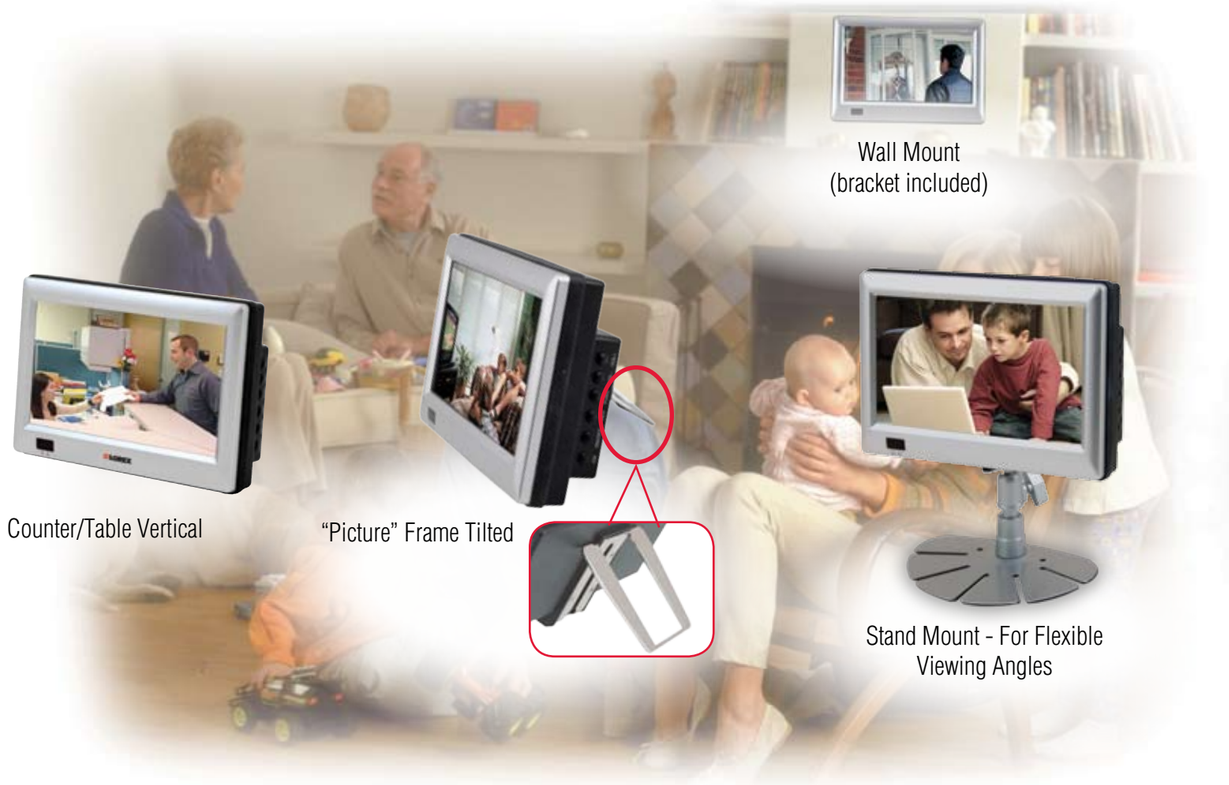

It's all on the Web

www.lorexcctv.com

For detailed setup information, please refer to your User's Manual. For additional information, please visit our website **www.lorexcctv.com/support**